




MULTIGRIP RIVETS

DOME HEAD - ALUMINIUM RIVET, STEEL MANDREL

Material: Body: Aluminium Alloy 5052

Mandrel: Carbon Steel

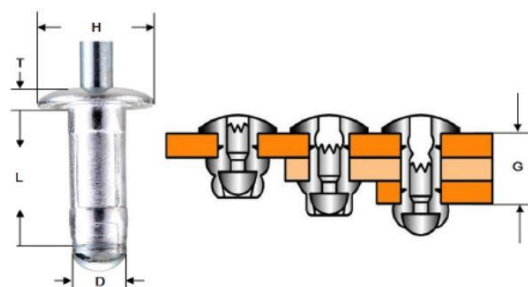

One rivet can be used in multiple material thickness, this reduces inventories and eliminates operator error.

Stem is locked in shell, eliminating the risk of mandrel head vibrating loose while providing a weather resistant joint.

The bulbing formation of the multi-grip rivet will fill slightly oversized holes, providing increased strength and vibration resistance.

| RIVET CODE | | | RIVET DIA D | | DRILL SIZE | RIVET L LENGTH MAX MM | GRIP RANGE G | STANDARD STRENGTH N. (nom.) | | HEAD DIAMETER H (mm) | HEAD THICKNESS T (mm)Max | BULK QTY | BOX QTY |
|--|--|--|------------------------|-----|------------|-----------------------|---------------|-----------------------------|---------|----------------------|--------------------------|----------|---------|
| | | | INCH | MM | | | | SHEAR | TENSILE | | | | |
| ALUMINIUM DOME HEAD RIVETS | | | | | | | | | | | | | |
| ASMG43 | | | 1/8 | 3.2 | #30 3.3 | 8.2 | 1.0 - 4.8mm | 700N | 1000N | 6.4mm | 1.20 | 20000 | 1000 |
| ASMG45 | | | | | | 11.4 | 3.2 - 8.0mm | | | | | 10000 | 1000 |
| ASMG46 | | | | | | 13.0 | 4.8 - 9.6mm | | | | | 10000 | 1000 |
| ASMG54 | | | 5/32 | 4.0 | #20 4.1 | 10.5 | 1.6 - 6.4mm | 1000N | 1600N | 7.9mm | 1.50 | 10000 | 1000 |
| ASMG56 | | | | | | 13.6 | 4.8 - 9.6mm | | | | | 10000 | 500 |
| ASMG63 | | | 3/16 | 4.8 | #11 4.9 | 11.1 | 1.6 - 6.4mm | 1300N | 2100N | 9.5mm | 1.60 | 5000 | 500 |
| ASMG67 | | | | | | 15.9 | 6.4 - 11.2mm | | | | | 5000 | 500 |
| ASMG69 | | | | | | 19.3 | 9.6 - 14.3mm | | | | | 5000 | 500 |
| ASMG612 | | | | | | 23.8 | 14.3 - 19.1mm | | | | | 5000 | 250 |
| ASMG614 | | | | | | 27.0 | 17.6 - 22.3mm | | | | | 2500 | 250 |
| ALUMINIUM LARGE FLANGE RIVETS | | | | | | | | | | | | | |
| ASMG68LF | | | 3/16 | 4.8 | #11 4.9 | 17.5 | 8.0 - 12.7mm | 1300N | 2100N | 16.0mm | 2.34 | 2500 | 250 |
| ASMG612LF | | | | | | 23.8 | 11.2 - 19.1mm | | | | | 2000 | 200 |
| ALUMINIUM COUNTERSUNK RIVETS | | | | | | | | | | | | | |
| ASMG64CSK | | | 3/16 | 4.8 | #11 4.9 | 11.1 | 1.6 - 6.4mm | 1300N | 2100N | | | 5000 | 500 |
| ASMG67CSK | | | | | | 15.9 | 6.4 - 11.2mm | | | | | 5000 | 500 |
| ALUMINIUM DOME HEAD RIVETS WITH 304 STAINLESS STEEL STEMS | | | | | | | | | | | | | |
| ASTMG53-55 | | | 5/32 | 4.0 | #20 4.1 | 12.0 | 1.6 - 6.4mm | 1000N | 1600N | | | 5000 | 500 |
| ASTMG53-55SU | | | Painted shell Surfmist | | | | | | | | | 5000 | 500 |
| STAINLESS STEEL 304 DOME HEAD RIVETS WITH STAINLESS STEEL STEMS | | | | | | | | | | | | | |
| STSSMG41-43 | | | 1/8 | 3.2 | #30 3.3 | 9.9 | 1.0 - 4.8mm | 1440N | 1980N | 6.4mm | 1.20 | 20000 | 1000 |
| STSSMG44-46 | | | | | | 14.6 | 4.8 - 9.6mm | | | | | 10000 | 1000 |
| STSSMG52-54 | | | 5/32 | 4.0 | #20 4.1 | 12.0 | 1.6 - 6.4mm | 2420N | 3250N | 7.9mm | 1.50 | 10000 | 1000 |
| STSSMG54-56 | | | | | | 15.2 | 4.8 - 9.6mm | | | | | 10000 | 500 |
| STSSMG62-63 | | | 3/16 | 4.8 | #11 4.9 | 11.1 | 1.6 - 6.4mm | 4000N | 4490N | 9.5mm | 1.60 | 5000 | 500 |
| STSSMG64-66 | | | | | | 15.9 | 4.8 - 9.6mm | | | | | 5000 | 500 |
| STSSMG66-68 | | | | | | 19.3 | 8.0-12.7mm | | | | | 5000 | 500 |
| STSSMG69-611 | | | | | | 23.8 | 12.7-17.5mm | | | | | 5000 | 250 |

PRICES \$ PER 1000 BULK AND BOX PACKS




ALUMINIUM RIVETS AS

DOMED HEAD - ALUMINIUM RIVET, STEEL MANDREL

Material: Body: Aluminium Alloy 5050

Mandrel: Carbon Steel

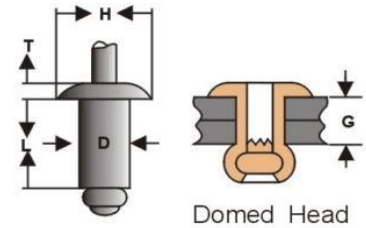


Domed Head

A general purpose rivet used extensively for:-

Roofing, guttering, flyscreen doors, toys, white goods, garden sheds, roller doors, caravans, boats,

Electrical appliances, building industry. Can be used as exterior/interior rivet.

| RIVET CODE | | | RIVET DIA D | | DRILL SIZE | RIVET L LENGTH MAX MM | GRIP RANGE G | STANDARD STRENGTH | | HEAD DIAMETER H (mm) | HEAD THICKNESS T (mm)Max | BULK QTY | BOX QTY |
|------------|--|--|-------------|-----|------------|--------------------------|-----------------|-------------------|---------|-------------------------|-----------------------------|----------|---------|
| | | | INCH | MM | | | | LBS (min) | TENSILE | | | | |
| AS3-3 | | | 3/32 | 2.4 | 2.5 | 8.0 | 3.2 - 4.8 | 70 | 80 | 4.3 - 5.0 | 0.8 | 20000 | 1000 |
| AS4-1 | | | 1/8 | 3.2 | #30 3.3 | 5.1 | 0.8 - 1.6 | 120 | 150 | 5.8 - 6.5 | 1.2 | 20000 | 1000 |
| AS4-2 | | | | | | 6.7 | 1.6 - 3.2 | | | | | 20000 | 1000 |
| AS4-3 | | | | | | 8.2 | 3.2 - 4.8 | | | | | 20000 | 1000 |
| AS4-4 | | | | | | 9.9 | 4.8 - 6.4 | | | | | 20000 | 1000 |
| AS4-5 | | | | | | 11.4 | 6.4 - 7.9 | | | | | 20000 | 1000 |
| AS4-6 | | | | | | 13.0 | 7.9 - 9.5 | | | | | 20000 | 1000 |
| AS4-8 | | | | | | 16.2 | 9.5 - 12.7 | | | | | 10000 | 1000 |
| AS4-10 | | | | | | 19.4 | 12.7 - 15.9 | | | | | 10000 | 1000 |
| AS4-12 | | | | | | 22.2 | 15.9 - 19.0 | | | | | 10000 | 500 |
| AS5-2 | | | 5/32 | 4.0 | #20 4.1 | 7.3 | 1.6 - 3.2 | 190 | 230 | 7.0 - 8.0 | 1.5 | 10000 | 1000 |
| AS5-3 | | | | | | 8.9 | 3.2 - 4.8 | | | | | 10000 | 1000 |
| AS5-4 | | | | | | 10.5 | 4.8 - 6.4 | | | | | 10000 | 1000 |
| AS5-5 | | | | | | 12.0 | 6.4 - 7.9 | | | | | 10000 | 1000 |
| AS5-6 | | | | | | 13.6 | 7.9 - 9.5 | | | | | 10000 | 1000 |
| AS5-8 | | | | | | 16.8 | 9.5 - 12.7 | | | | | 10000 | 500 |
| AS5-10 | | | | | | 20.0 | 12.7 - 15.9 | | | | | 10000 | 500 |
| AS5-12 | | | | | | 22.5 | 15.9 - 19.0 | | | | | 5000 | 500 |
| AS6-2 | | | 3/16 | 4.8 | #11 4.9 | 8.0 | 1.6 - 3.2 | 260 | 320 | 8.5 - 9.5 | 1.6 | 10000 | 500 |
| AS6-3 | | | | | | 9.5 | 3.2 - 4.8 | | | | | 10000 | 500 |
| AS6-4 | | | | | | 11.1 | 4.8 - 6.4 | | | | | 10000 | 500 |
| AS6-5 | | | | | | 12.7 | 6.4 - 7.9 | | | | | 10000 | 500 |
| AS6-6 | | | | | | 14.3 | 7.9 - 9.5 | | | | | 5000 | 500 |
| AS6-8 | | | | | | 17.5 | 11.1 - 12.7 | | | | | 5000 | 500 |
| AS6-10 | | | | | | 20.7 | 12.7 - 15.9 | | | | | 5000 | 250 |
| AS6-12 | | | | | | 23.8 | 15.9 - 19.0 | | | | | 5000 | 250 |
| AS6-14 | | | | | | 27.0 | 19.0 - 22.2 | | | | | 2500 | 250 |
| AS6-16 | | | | | | 30.2 | 22.2 - 25.4 | | | | | 2500 | 250 |
| AS6-20 | | | | | | 36.5 | 25.4 - 31.7 | | | | | 1500 | 150 |
| AS6-22 | | | | | | 40.0 | 30.0 - 35.0 | | | | | 1500 | 150 |
| AS8-4 | | | 1/4 | 6.4 | 6.5 | 12.4 | 3.2 - 6.4 | 460 | 560 | 11.5 - 13.0 | 2.2 | 4000 | 400 |
| AS8-6 | | | | | | 15.5 | 6.4 - 9.5 | | | | | 3500 | 350 |
| AS8-8 | | | | | | 18.7 | 9.5 - 12.7 | | | | | 3000 | 300 |
| AS8-10 | | | | | | 21.9 | 12.7 - 15.9 | | | | | 2500 | 250 |
| AS8-12 | | | | | | 25.1 | 15.9 - 19.0 | | | | | 2500 | 250 |
| AS8-16 | | | | | | 31.4 | 22.2 - 25.4 | | | | | 2000 | 200 |



PAINTED RIVETS

DOMED HEAD - ALUMINIUM RIVET, STEEL MANDREL

| RIVET CODE | RIVET DIA D INCH MM | DRILL SIZE | RIVET L LENGTH MAX MM | GRIP RANGE G | STANDARD STRENGTH | | HEAD DIAMETER H (mm) | HEAD THICKNESS T (mm)Max | BULK QTY | BOX QTY |
|------------|------------------------|------------|--------------------------|-----------------|-------------------|---------------|-------------------------|-----------------------------|----------|---------|
| | | | | | LBS (min) | SHEAR TENSILE | | | | |
| AS4-3 | 1/8 3.2 | #30 3.3 | 8.2 | 3.2 - 4.8 | 120 | 150 | 5.8 - 6.5 | 1.2 | 20000 | 1000 |
| AS4-4 | | | 9.9 | 4.8 - 6.4 | | | | | 20000 | 1000 |
| AS4-6 | | | 13.0 | 7.9 - 9.5 | | | | | 20000 | 1000 |
| ASMG56 | 5/32 4.0 | 4.2 | 13.6 | 4.8 - 9.6 | 225 | 360 | 7.9 | 1.27 | 10000 | 500 |
| ASMG63 | 3/16 4.8 | 4.9 | 11.1 | 1.6 - 6.4 | 292 | 472 | 9.5 | 1.60 | 5000 | 500 |
| ASMG67 | | | 15.9 | 6.4 - 11.2 | | | | | 5000 | 500 |

| COLOUR NAME | AS4-3 | AS4-4 | AS4-6 | ASMG56 | ASMG63 | ASMG67 |
|----------------|-------|-------|-------|--------|--------|--------|
| Basalt™ | X | | | X | | |
| Bronze | X | X | | | | |
| Classic Cream™ | X | | X | X | | |
| Cottage Green™ | X | | | X | | |
| Cove™ | X | | | X | | |
| Deep Ocean™ | X | | | X | | |
| Dune® | X | | | X | | |
| Evening Haze® | X | | | X | | |
| Gully™ | X | | | X | | |
| Ironstone™ | X | | | X | | |
| Jasper™ | X | | | X | | |
| Manor Red™ | X | | | X | | |
| Mangrove™ | X | | | X | | |
| Monument™ | X | | | X | | |
| Night Sky™ | X | X | X | X | | X |
| Pale Eucalypt™ | X | | | X | X | |
| Paperbark™ | X | X | X | X | X | |
| Pearl White | X | | | | | |
| Shale Grey™ | X | | | X | | |
| Surfmist® | X | | | X | X | X |
| Terrain™ | X | | | X | | |
| White | X | X | X | X | | X |
| Wallaby™ | X | | | X | | |
| Windspray® | X | | | X | | |
| Woodland Grey™ | X | | X | X | | |


PRICES \$ PER 1000 BULK AND BOX PACKS



ALUMINIUM RIVETS LARGE FLANGE AS-LF DOME HEAD - ALUMINIUM RIVET, STEEL MANDREL

Material: Body: Aluminium Alloy 5050

Mandrel: Carbon Steel

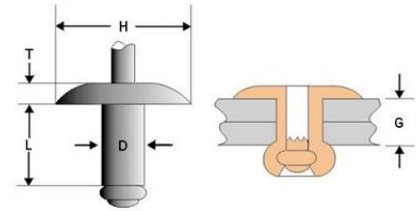


LARGE FLANGE RIVETS provide greater bearing surface for fastening soft and brittle facing materials such as plywood and plastics including neoprene, vinyl, etc.

| RIVET CODE | RIVET DIA D INCH MM | DRILL SIZE | RIVET L LENGTH MAX MM | GRIP RANGE G | STANDARD STRENGTH | | HEAD DIAMETER H (mm) | HEAD THICKNESS T (mm) | BULK QTY | BOX QTY |
|------------|------------------------|------------|--------------------------|-----------------|--------------------|---------|-------------------------|--------------------------|----------|---------|
| | | | | | LBS (min) SHEAR | TENSILE | | | | |
| AS4-2LF | 1/8 3.2 | #30 3.3 | 6.7 | 1.6 - 3.2 | 120 | 150 | 9.6 | 1.6 | 10000 | 1000 |
| AS4-4LF | | | 9.9 | 4.8 - 6.4 | | | | | 10000 | 1000 |
| AS4-6LF | | | 13.0 | 7.9 - 9.5 | | | | | 10000 | 500 |
| AS5-4LF | 5/32 4.0 | #20 4.1 | 10.5 | 4.8 - 6.4 | 190 | 230 | 12.0 | 1.9 | 5000 | 500 |
| AS5-6LF | | | 13.6 | 6.4 - 9.5 | | | | | 5000 | 500 |
| AS6-3LF | 3/16 4.8 | #11 4.9 | 9.5 | 3.2 - 4.8 | 260 | 320 | 16.0 | 2.3 | 5000 | 250 |
| AS6-4LF | | | 11.1 | 4.8 - 6.4 | | | | | 5000 | 250 |
| AS6-6LF | | | 14.3 | 7.9 - 9.5 | | | | | 2500 | 250 |
| AS6-8LF | | | 17.5 | 11.1 - 12.7 | | | | | 2500 | 250 |
| AS6-10LF | | | 20.7 | 12.7 - 15.9 | | | | | 2000 | 200 |
| AS6-12LF | | | 23.8 | 15.9 - 19.0 | | | | | 2000 | 200 |
| AS6-16LF | | | 30.2 | 22.2 - 25.4 | | | | | 2000 | 100 |

ALUMINIUM RIVETS 120° COUNTERSUNK ASC ALUMINIUM RIVET, STEEL MANDREL

Material: Body: Aluminium Alloy 5050

Mandrel: Carbon Steel

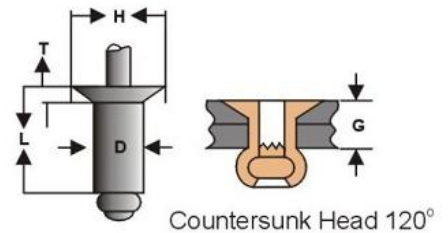

Countersunk Head 120°

COUNTERSUNK RIVETS are for applications where a flush appearance is required.

| RIVET CODE | RIVET DIA D INCH MM | DRILL SIZE | RIVET LENGTH MAX MM | GRIP RANGE G | STANDARD STRENGTH | | HEAD DIAMETER H (mm) | HEAD THICKNESS T (mm) | BULK QTY | BOX QTY |
|------------|------------------------|------------|------------------------|-----------------|--------------------|---------|-------------------------|--------------------------|----------|---------|
| | | | | | LBS (min) SHEAR | TENSILE | | | | |
| ASC4-3 | 1/8 3.2 | #30 3.3 | 8.2 | 3.2 - 4.8 | 120 | 150 | 6.5 | 1.2 | 20000 | 1000 |
| ASC4-4 | | | 9.9 | 4.8 - 6.4 | | | | | 20000 | 1000 |
| ASC4-6 | | | 13.0 | 7.9 - 9.5 | | | | | 20000 | 1000 |
| ASC4-8 | | | 16.2 | 9.5 - 12.7 | | | | | 10000 | 1000 |
| ASC5-4 | 5/32 4.0 | #20 4.1 | 10.5 | 4.8 - 6.4 | 190 | 230 | 8.0 | 1.5 | 10000 | 1000 |
| ASC5-6 | | | 13.6 | 6.4 - 9.5 | | | | | 10000 | 500 |
| ASC5-8 | | | 16.8 | 9.5 - 12.7 | | | | | 10000 | 500 |
| ASC6-4 | 3/16 4.8 | #11 4.9 | 11.1 | 4.8 - 6.4 | 260 | 320 | 9.5 | 1.6 | 5000 | 250 |
| ASC6-6 | | | 14.3 | 7.9 - 9.5 | | | | | 5000 | 250 |
| ASC6-8 | | | 17.5 | 11.1 - 12.7 | | | | | 5000 | 250 |
| ASC6-10 | | | 20.7 | 12.7 - 15.9 | | | | | 5000 | 250 |
| ASC6-16 | | | 30.2 | 15.9 - 25.4 | | | | | 2500 | 250 |

PRICES \$ PER 1000 BULK AND BOX PACKS



STEEL RIVETS SS


DOME HEAD - STEEL RIVET, STEEL MANDREL SPECIFICATION GRADE 30



Where joining steel to steel, where tensile or shear strength dictate a stronger rivet; metal cabinets, Shelving, etc. Primarily an interior rivet can be used as exterior rivet provided the rivet or application is painted or coated.

| RIVET CODE | RIVET DIA D INCH MM | DRILL SIZE # | RIVET LENGTH MAX MM | STANDARD STRENGTH | | GRIP RANGE | | BULK | BOX |
|------------|------------------------|-----------------|------------------------|--------------------|---------|-------------|-------|------|-----|
| | | | | LBS (min) SHEAR | TENSILE | MM | QTY | QTY | |
| SS4-1 | 1/8 3.2 | #30 3.3 | 5.15 | 260 | 310 | 0.8 - 1.6 | 10000 | 1000 | |
| SS4-2 | | | 6.85 | | | 1.6 - 3.2 | 10000 | 1000 | |
| SS4-3 | | | 8.35 | | | 3.2 - 4.8 | 10000 | 1000 | |
| SS4-4 | | | 9.90 | | | 4.8 - 6.4 | 10000 | 1000 | |
| SS4-5 | | | 11.55 | | | 6.4 - 7.9 | 10000 | 1000 | |
| SS4-6 | | | 13.45 | | | 7.9 - 9.5 | 10000 | 1000 | |
| SS4-8 | | | 16.85 | | | 9.5 - 12.7 | 10000 | 1000 | |
| SS4-10 | | | 20.25 | | | 12.7 - 15.9 | 10000 | 1000 | |
| SS5-2 | 5/32 4.0 | #20 4.1 | 7.45 | 370 | 470 | 1.6 - 3.2 | 10000 | 1000 | |
| SS5-3 | | | 9.05 | | | 3.2 - 4.8 | 10000 | 1000 | |
| SS5-4 | | | 10.55 | | | 4.8 - 6.4 | 10000 | 1000 | |
| SS5-5 | | | 12.05 | | | 6.4 - 7.9 | 10000 | 1000 | |
| SS5-6 | | | 13.75 | | | 7.9 - 9.5 | 10000 | 500 | |
| SS5-8 | | | 16.80 | | | 9.5 - 12.7 | 10000 | 500 | |
| SS6-1 | 3/16 4.8 | #11 4.9 | 6.45 | 540 | 680 | 1.6 - 3.2 | 5000 | 500 | |
| SS6-2 | | | 8.05 | | | 1.6 - 3.2 | 5000 | 500 | |
| SS6-3 | | | 9.65 | | | 3.2 - 4.8 | 5000 | 500 | |
| SS6-4 | | | 11.25 | | | 4.8 - 6.4 | 5000 | 500 | |
| SS6-5 | | | 12.85 | | | 6.4 - 7.9 | 5000 | 500 | |
| SS6-6 | | | 14.45 | | | 7.9 - 9.5 | 5000 | 500 | |
| SS6-8 | | | 17.55 | | | 9.5 - 12.7 | 5000 | 500 | |
| SS6-10 | | | 21.45 | | | 12.7 - 15.9 | 5000 | 250 | |
| SS6-12 | | | 22.65 | | | 15.9 - 19.0 | 5000 | 250 | |
| SS6-16 | | | 30.20 | | | 19.0 - 25.4 | 2000 | 250 | |
| SB8-4 | 1/4 6.4 | 6.5 | 12.60 | 1140 | 1550 | 1.6 - 6.4 | 2500 | 250 | |
| SB8-6 | | | 15.80 | | | 6.4 - 9.5 | 2500 | 250 | |
| SB8-8 | | | 19.00 | | | 9.5 - 12.7 | 2500 | 200 | |
| SB8-12 | | | 25.30 | | | 15.9 - 19.0 | 2500 | 250 | |
| SB8-16 | | | 31.50 | | | 19.0 - 25.4 | 2000 | 100 | |

LARGE FLANGE - STEEL RIVET, STEEL MANDREL SPECIFICATION GRADE 30




| RIVET CODE | RIVET DIA D INCH MM | DRILL SIZE # | RIVET L LENGTH MAX MM | GRIP RANGE G | STANDARD STRENGTH | | HEAD | HEAD | BULK | BOX |
|------------|------------------------|-----------------|-----------------------------|-----------------|--------------------|---------|--------------------|---------------------|-------|------|
| | | | | | LBS (min) SHEAR | TENSILE | DIAMETER H (mm) | THICKNESS T (mm) | QTY | QTY |
| SBL4-4 | 1/8 3.2 | #30 3.3 | 10.2 | 4.9 - 6.4 | 305 | 410 | 9.53 | 1.65 | 10000 | 1000 |
| SBL6-4 | 3/16 4.8 | #11 4.9 | 11.5 | 1.6 - 6.4 | 610 | 870 | 15.88 | 2.28 | 5000 | 250 |
| SBL6-6 | | | 14.6 | 6.5 - 9.5 | | | | | 5000 | 250 |
| SBL6-8 | | | 17.8 | 9.6 - 12.7 | | | | | 2000 | 100 |
| SBL6-12 | | | 24.2 | 16.0 - 19.1 | | | | | 2000 | 100 |

PRICES \$ PER 1000 BULK AND BOX PACKS



ALL STAINLESS STEEL SSB-S
BUTTONHEAD - STAINLESS STEEL RIVET, STAINLESS STEEL MANDREL
SPECIFICATION GRADE 304





Domed Head

Excellent corrosion resistance, non staining. For food and marine industries and lifetime applications.



| RIVET CODE | | | RIVET DIA D | | DRILL SIZE | RIVET L LENGTH MAX MM | GRIP RANGE G | STANDARD STRENGTH | | HEAD DIAMETER H (mm) | HEAD THICKNESS T (mm) | BULK QTY | BOX QTY |
|------------|--|--|-------------|-----|------------|-----------------------|--------------|-------------------|---------------|----------------------|-----------------------|----------|---------|
| | | | INCH | MM | | | | LBS (min) | SHEAR TENSILE | | | | |
| SSB4-2S | | | 1/8 | 3.2 | #30 3.3 | 6.7 | 1.6 - 3.2 | 420 | 530 | 6.5 | 1.0 | 20000 | 1000 |
| SSB4-3S | | | | | | 8.2 | 3.2 - 4.8 | | | | | 20000 | 1000 |
| SSB4-4S | | | | | | 9.9 | 4.8 - 6.4 | | | | | 20000 | 1000 |
| SSB4-6S | | | | | | 13.0 | 6.4 - 9.5 | | | | | 10000 | 1000 |
| SSB4-8S | | | | | | 16.2 | 9.5 - 12.7 | | | | | 10000 | 1000 |
| SSB5-2S | | | 5/32 | 4.0 | #20 4.1 | 7.3 | 1.6 - 3.2 | 650 | 820 | 8.0 | 1.2 | 10000 | 1000 |
| SSB5-4S | | | | | | 10.5 | 3.2 - 6.4 | | | | | 10000 | 1000 |
| SSB5-6S | | | | | | 13.6 | 6.4 - 9.5 | | | | | 5000 | 500 |
| SSB6-2S | | | 3/16 | 4.8 | #11 4.9 | 8.0 | 1.6 - 3.2 | 950 | 1200 | 9.5 | 1.5 | 5000 | 500 |
| SSB6-4S | | | | | | 11.1 | 3.2 - 6.4 | | | | | 5000 | 500 |
| SSB6-6S | | | | | | 14.3 | 6.4 - 9.5 | | | | | 5000 | 500 |
| SSB6-8S | | | | | | 17.5 | 9.5 - 12.7 | | | | | 5000 | 500 |
| SSB6-10S | | | | | | 20.7 | 12.7 - 15.9 | | | | | 5000 | 250 |
| SSB6-12S | | | | | | 23.8 | 15.9 - 19.1 | | | | | 5000 | 250 |
| SSB8-4S | | | 1/4 | 6.4 | 6.5 | 12.4 | 1.6 - 6.4 | 1700 | 2100 | 13.0 | 2.2 | 2500 | 250 |
| SSB8-8S | | | | | | 18.7 | 6.4 - 12.7 | | | | | 2500 | 250 |
| SSB8-12S | | | | | | 25.1 | 12.7 - 19.1 | | | | | 2500 | 250 |

ALL STAINLESS STEEL SSBL-S
LARGE FLANGE



| | | | | | | | | | | | | | |
|-----------|--|--|------|-----|---------|------|-------------|-----|------|------|-----|-------|-----|
| SSBL4-4S | | | 1/8 | 3.2 | #30 3.3 | 10.2 | 4.8 - 6.4 | 420 | 530 | 9.6 | 1.6 | 10000 | 500 |
| SSBL6-4S | | | 3/16 | 4.8 | #11 4.9 | 11.4 | 4.8 - 6.4 | 950 | 1200 | 16.0 | 2.3 | 5000 | 250 |
| SSBL6-6S | | | | | | 14.6 | 7.9 - 9.5 | | | | | 5000 | 250 |
| SSBL6-12S | | | | | | 24.1 | 16.0 - 19.1 | | | | | 2000 | 100 |

ALL STAINLESS STEEL SSC-S
COUNTERSUNK



| | | | | | | | | | | | | | |
|---------|--|--|------|-----|---------|------|-----------|------|------|-----|-----|-------|------|
| SSC4-3S | | | 1/8 | 3.2 | #30 3.3 | 8.4 | 3.2 - 4.8 | 420 | 530 | 6.5 | 1.0 | 10000 | 1000 |
| SSC5-4S | | | 5/32 | 4.0 | #20 4.1 | 10.6 | 3.2 - 6.4 | 650 | 820 | 8.0 | 1.2 | 5000 | 250 |
| SSC6-4S | | | 3/16 | 4.8 | #11 4.9 | 11.2 | 3.2 - 6.4 | 1150 | 1300 | 9.5 | 1.5 | 5000 | 250 |
| SSC6-6S | | | | | | 14.5 | 6.4 - 9.5 | | | | | 5000 | 250 |

PRICES \$ PER 1000 BULK AND BOX PACKS



NICKEL/COPPER ALLOY RIVETS MB
BUTTONHEAD - NICKEL/COPPER ALLOY RIVET, STEEL MANDREL
SPECIFICATION 400



This material gives excellent corrosion resistance for plumbing applications
 With increased shear and tensile strength it is one of the strongest rivets in the product range.

| RIVET CODE | OTHER CODE | RIVET DIA | | DRILL SIZE | | RIVET LENGTH MAX MM | TYPICAL ULTIMATE STRENGTH (LBS) | | GRIP RANGE | | BULK | BOX |
|-------------------------|------------|-----------|-----|------------|-----|---------------------|---------------------------------|---------|-------------|-------|------|-----|
| | | INCH | MM | | | | SHEAR | TENSILE | MM | QTY | QTY | |
| MB4-2 | 73MS4-2 | 1/8 | 3.2 | #30 | 3.3 | 6.85 | 270 | 380 | 1.6 - 3.2 | 10000 | 1000 | |
| MB4-3 | 73MS4-3 | | | | | 8.35 | | | 3.2 - 4.8 | 10000 | 1000 | |
| MB4-4 | 73MS4-4 | | | | | 9.95 | | | 4.8 - 6.4 | 10000 | 1000 | |
| MB4-6 | 73MS4-6 | | | | | 13.45 | | | 6.4 - 9.5 | 10000 | 1000 | |
| MB5-2 | 73MS5-2 | 5/32 | 4.0 | #20 | 4.1 | 7.45 | 760 | 870 | 1.6 - 3.2 | 10000 | 500 | |
| MB5-4 | 73MS5-4 | | | | | 10.55 | | | 3.2 - 6.4 | 10000 | 500 | |
| MB5-5 | 73MS5-5 | | | | | 12.05 | | | 6.4 - 7.9 | 10000 | 500 | |
| MB5-6 | 73MS5-6 | | | | | 13.75 | | | 7.9 - 9.5 | 5000 | 500 | |
| MB6-2 | 73MS6-2 | 3/16 | 4.8 | #11 | 4.9 | 8.05 | 900 | 1100 | 1.6 - 3.2 | 5000 | 500 | |
| MB6-3 | 73MS6-3 | | | | | 9.65 | | | 3.2 - 4.8 | 5000 | 500 | |
| MB6-4 | 73MS6-4 | | | | | 11.25 | | | 4.8 - 6.4 | 5000 | 500 | |
| MB6-5 | 73MS6-5 | | | | | 12.85 | | | 6.4 - 7.9 | 5000 | 500 | |
| MB6-6 | 73MS6-6 | | | | | 14.45 | | | 7.9 - 9.5 | 5000 | 500 | |
| MB6-8 | 73MS6-8 | | | | | 17.55 | | | 9.5 - 12.7 | 5000 | 500 | |
| MB6-10 | 73MS6-10 | | | | | 21.45 | | | 12.7 - 15.9 | 2500 | 250 | |
| MB8-4 | TLPD850 | 1/4 | 6.4 | | 6.5 | 13.00 | 1200 | 1500 | Max 7.6 | 1500 | 100 | |
| MB8-8 | TLPD870 | | | | | 18.00 | | | 7.6 - 12.7 | 1500 | 100 | |
| 120° COUNTERSUNK | | | | | | | | | | | | |
| MC4-2 | 72MS4-2 | 1/8 | 3.2 | #30 | 3.3 | 6.1 | 270 | 380 | 1.6 - 3.2 | 10000 | 1000 | |
| MC4-4 | 72MS4-4 | | | | | 9.3 | | | 3.2 - 6.4 | 10000 | 1000 | |
| MC4-6 | 72MS4-6 | | | | | 13.5 | | | 6.4 - 9.5 | 10000 | 1000 | |
| MC5-4 | 72MS5-4 | 5/32 | 4.0 | #20 | 4.1 | 10.0 | 760 | 870 | 3.2 - 6.4 | 10000 | 1000 | |
| MC6-2 | 72MS6-2 | 3/16 | 4.8 | #11 | 4.9 | 8.0 | 900 | 1100 | 1.6 - 3.2 | 5000 | 500 | |
| MC6-4 | 72MS6-4 | | | | | 11.5 | | | 3.2 - 6.4 | 5000 | 500 | |
| MC6-6 | 72MS6-6 | | | | | 14.7 | | | 7.9 - 9.5 | 5000 | 500 | |
| MC8-4 | TLPK850 | | 6.4 | | 6.5 | 12.7 | 1200 | 1500 | 1.6 - 6.4 | 2000 | 200 | |

COPPER RIVETS
BUTTON HEAD - COPPER RIVET, STEEL MANDREL
SPECIFICATION 110



Good corrosion resistance, mainly used in plumbing applications and for decorative purposes.

| RIVET CODE | OTHER CODE | RIVET DIA | | DRILL SIZE | | RIVET LENGTH MAX MM | TYPICAL ULTIMATE STRENGTH (LBS) | | GRIP RANGE | | BULK | BOX |
|------------|------------|-----------|-----|------------|-----|---------------------|---------------------------------|---------|------------|-------|------|-----|
| | | INCH | MM | | | | SHEAR | TENSILE | MM | QTY | QTY | |
| CB4-2 | | 1/8 | 3.2 | #30 | 3.3 | 6.0 | 181 | 227 | 1.6 - 3.2 | 10000 | 1000 | |
| CB4-4 | | | | | | 10.0 | | | 3.2 - 6.4 | 10000 | 1000 | |


PRICES \$ PER 1000 BULK AND BOX PACKS



ALL ALUMINIUM RIVETS

BUTTONHEAD - ALUMINIUM RIVET, ALUMINIUM MANDREL SPECIFICATION 5052

Used in applications when the finished product must use only aluminium components
Joining plastic to thin aluminium sheet (joining soft to thin materials).




Domed Head

| RIVET CODE | RIVET DIA D INCH MM | DRILL SIZE | RIVET L LENGTH MAX MM | GRIP RANGE G | STANDARD STRENGTH | | HEAD DIAMETER H (mm) | HEAD THICKNESS T (mm) | BULK QTY | BOX QTY |
|------------|------------------------|------------|-----------------------------|--------------------|--------------------|---------|----------------------------|-----------------------------|-------------|------------|
| | | | | | LBS (min) SHEAR | TENSILE | | | | |
| AA4-2 | 1/8 3.2 | #30 3.3 | 6.7 | 1.6 - 3.2 | 120 | 150 | 6.5 | 1.2 | 20000 | 1000 |
| AA4-3 | | | 8.2 | 3.2 - 4.8 | | | | | 20000 | 1000 |
| AA4-4 | | | 9.9 | 4.8 - 6.4 | | | | | 20000 | 1000 |
| AA4-6 | | | 13.0 | 8.0 - 9.5 | | | | | 20000 | 1000 |
| AA5-2 | 5/32 4.0 | #20 4.1 | 7.3 | 0.8 - 3.2 | 190 | 230 | 8.0 | 1.5 | 10000 | 1000 |
| AA5-4 | | | 10.5 | 4.8 - 6.4 | | | | | 10000 | 1000 |
| AA5-6 | | | 13.6 | 8.0 - 9.6 | | | | | 10000 | 500 |
| AA6-2 | 3/16 4.8 | #11 4.9 | 8.0 | 0.8 - 3.2 | 260 | 320 | 9.5 | 1.6 | 10000 | 500 |
| AA6-4 | | | 11.1 | 4.8 - 6.4 | | | | | 10000 | 500 |
| AA6-6 | | | 14.3 | 8.0 - 9.6 | | | | | 5000 | 500 |
| AA6-8 | | | 17.5 | 9.6 - 12.7 | | | | | 5000 | 500 |
| AA6-12 | | | 23.8 | 15.9 - 19.1 | | | | | 5000 | 250 |

PEEL ALUMINIUM RIVETS

BUTTONHEAD - ALUMINIUM RIVET, STEEL STEM ASP- (SPECIFICATION)

Used to fasten to softer materials, wood, plastic widely used in caravans, trailers and furniture.




| RIVET CODE | RIVET DIA D INCH MM | DRILL SIZE | RIVET L LENGTH MAX MM | GRIP G RANGE MAX MM | STANDARD STRENGTH | | HEAD DIAMETER H (mm) | HEAD THICKNESS T (mm) | BULK QTY | BOX QTY |
|------------|------------------------|------------|-----------------------------|---------------------------|--------------------|---------|----------------------------|-----------------------------|-------------|------------|
| | | | | | LBS (min) SHEAR | TENSILE | | | | |
| ASP4-4 | 1/8 3.2 | 9/64 | 12.0 | 6.40 | 170 | 220 | 6.5 | 1.2 | 10000 | 1000 |
| ASP4-6 | | | 15.0 | 9.50 | | | | | 10000 | 1000 |
| ASP5-6 | 5/32 4.0 | 11/64 | 16.0 | 9.50 | 260 | 350 | 8.0 | 1.5 | 10000 | 500 |
| ASP6-5 | 3/16 4.8 | 13/64 | 14.0 | 7.90 | 380 | 500 | 9.5 | 1.6 | 5000 | 500 |
| ASP6-6 | | | 16.0 | 9.50 | | | | | 5000 | 500 |
| ASP6-8 | | | 19.0 | 12.70 | | | | | 5000 | 500 |
| ASP6-10 | | | 22.0 | 15.90 | | | | | 5000 | 500 |
| ASP6-12 | | | 25.0 | 19.10 | | | | | 5000 | 500 |
| ASP6-16 | | | 32.0 | 25.40 | | | | | 2500 | 250 |

LSR - LOAD SPREAD RIVETS

ACD BUTTONHEAD - ALUMINIUM RIVET, ALUMINIUM MANDREL

During installation the body of the rivet folds into 3 separate legs which create a large bearing surface and distributes the clamp force allowing soft or thin materials to be joined without damage.


Material: Body: Aluminium Alloy (2.5Mg) AA5052
Mandrel: Aluminium Alloy (2.5Mg) AA5052

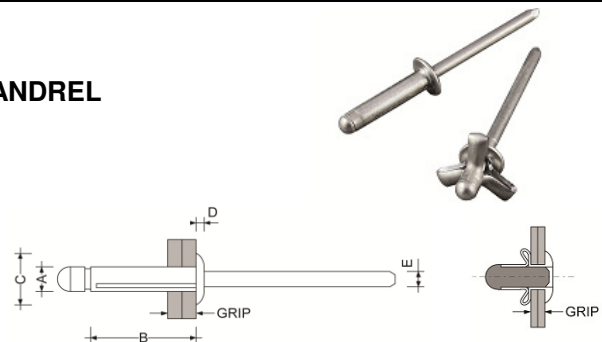

| RIVET CODE | RIVET DIA INCH MM | DRILL SIZE | RIVET LENGTH B MM | GRIP RANGE MM | STANDARD STRENGTH | | HEAD DIAMETER C (mm) | HEAD THICKNESS D (mm) | BULK QTY | BOX QTY |
|------------|----------------------|------------|----------------------|------------------|-------------------|---------|----------------------------|-----------------------------|-------------|------------|
| | | | | | N SHEAR | TENSILE | | | | |
| ACD508 | 5/32 4.0 | #20 4.1 | 18.8 | 1.0 - 7.0 | 600 | 1000 | 8.0 | 1.4 | 4000 | 1000 |
| ACD612 | 3/16 4.8 | #11 4.9 | 20.5 | 1.0 - 9.0 | 900 | 1200 | 9.8 | 1.8 | | 1000 |
| ACD616 | | | 24.0 | 4.0 - 12.0 | 900 | 1200 | 9.8 | 1.8 | 2500 | 1000 |




CLOSED END RIVETS ASCE (SEALED)
ALUMINIUM RIVET, STEEL MANDREL
SPECIFICATION IFI-126/GRADE 19



Closed end blind rivets are designed to enclose the mandrel head after fastening and are suitable for many applications which ask for waterproof. Provide a high shear, vibration resistance and pressure tight.

| RIVET CODE | | | RIVET DIA D | | DRILL SIZE | RIVET L LENGTH MAX MM | GRIP RANGE G | STANDARD STRENGTH | | HEAD DIAMETER H (mm) | HEAD THICKNESS T (mm) | BULK QTY | BOX QTY |
|------------|--|--|-------------|-----|------------|-----------------------|--------------|-------------------|---------|----------------------|-----------------------|----------|---------|
| | | | INCH | MM | | | | LBS (min) | TENSILE | | | | |
| ASCE4-1 | | | 1/8 | 3.2 | #30 3.3 | 7.5 | 0.8 - 1.6 | 240 | 280 | 6.5 | 1.3 | 20000 | 1000 |
| ASCE4-2 | | | | | | 9.1 | 1.6 - 3.2 | | | | | 20000 | 1000 |
| ASCE4-3 | | | | | | 10.7 | 3.2 - 4.8 | | | | | 20000 | 1000 |
| ASCE4-4 | | | | | | 12.3 | 4.8 - 6.4 | | | | | 10000 | 1000 |
| ASCE4-5 | | | | | | 13.9 | 6.4 - 7.9 | | | | | 10000 | 1000 |
| ASCE4-6 | | | | | | 15.5 | 7.9 - 9.5 | | | | | 10000 | 1000 |
| ASCE5-2 | | | 5/32 | 4.0 | #20 4.1 | 9.5 | 1.6 - 3.2 | 350 | 480 | 8.0 | 1.7 | 10000 | 1000 |
| ASCE5-4 | | | | | | 12.7 | 3.2 - 6.4 | | | | | 10000 | 500 |
| ASCE5-5 | | | | | | 14.3 | 6.4 - 7.9 | | | | | 10000 | 500 |
| ASCE6-2 | | | 3/16 | 4.8 | #11 4.9 | 10.3 | 1.6 - 3.2 | 500 | 690 | 9.5 | 2.0 | 10000 | 500 |
| ASCE6-3 | | | | | | 11.9 | 3.2 - 4.8 | | | | | 10000 | 500 |
| ASCE6-4 | | | | | | 13.5 | 4.8 - 6.4 | | | | | 5000 | 500 |
| ASCE6-5 | | | | | | 15.0 | 6.4 - 7.9 | | | | | 5000 | 500 |
| ASCE6-6 | | | | | | 16.7 | 7.9 - 9.5 | | | | | 5000 | 500 |
| ASCE6-8 | | | | | | 19.8 | 9.5 - 12.7 | | | | | 5000 | 500 |
| ASCE6-10 | | | | | | 23.0 | 12.7 - 15.9 | | | | | 5000 | 250 |
| ASCE6-12 | | | | | | 25.1 | 15.9 - 19.1 | | | | | 5000 | 250 |



CLOSED END RIVETS COUNTERSUNK HEAD
5056 ALUMINIUM RIVET, STEEL STEM



| | | | | | | | | | | | | | |
|----------|--|--|--|--|----------|---------|-----------|-----|-----|-----|-----------|-------|------|
| ASCEC4-2 | | | | | 1/8 3.2 | #30 3.3 | 1.6 - 3.2 | 240 | 280 | 6.5 | 1.6 - 3.2 | 20000 | 1000 |
| ASCEC4-3 | | | | | | | 3.2 - 4.8 | | | | 3.2 - 4.8 | 20000 | 1000 |
| ASCEC6-4 | | | | | 3/16 4.8 | #11 4.9 | 3.2 - 6.4 | 500 | 690 | 9.5 | 3.2 - 6.4 | 5000 | 500 |
| ASCEC6-6 | | | | | | | 6.4 - 9.5 | | | | 6.4 - 9.5 | 5000 | 500 |

WATERPROOF RIVETS SSWP (SEALED)
STAINLESS STEEL RIVET, STAINLESS STEEL MANDREL
SPECIFICATION 304

Excellent corrosion resistance, high strength and high weather-proofing capabilities. ie food and marine industries.



| RIVET CODE | | | RIVET DIA | | DRILL SIZE | RIVET L LENGTH MAX MM | GRIP RANGE G | STANDARD STRENGTH | | HEAD DIAMETER H (mm) | HEAD THICKNESS T (mm) | BULK QTY | BOX QTY |
|------------|--|--|-----------|-----|------------|-----------------------|--------------|-------------------|---------|----------------------|-----------------------|----------|---------|
| | | | INCH | MM | | | | LBS (min) | TENSILE | | | | |
| SSWP4-3S | | | 1/8 | 3.2 | #30 3.3 | 9.9 | 3.2 - 4.8 | 450 | 495 | 6.0 | 1.3 | 10000 | 1000 |
| SSWP4-4S | | | | | | 11.5 | 4.8 - 6.4 | | | | | 10000 | 1000 |
| SSWP4-6S | | | | | | 14.7 | 6.4 - 9.5 | | | | | 10000 | 1000 |
| SSWP5-4S | | | 5/32 | 4.0 | #20 4.1 | 11.9 | 4.82 - 6.4 | 675 | 786 | 8.0 | 1.7 | 5000 | 500 |
| SSWP6-4S | | | 3/16 | 4.8 | #11 4.9 | 12.7 | 4.8 - 6.4 | 900 | 990 | 9.5 | 2.0 | 5000 | 500 |
| SSWP6-6S | | | | | | 15.9 | 6.4 - 9.5 | | | | | 5000 | 500 |

PRICES \$ PER 1000 BULK AND BOX PACKS



BLISTER PACK RANGE

| CODE | | QTY PER BLISTER | PACKS PER OUTER | RIVET DIA INCH | RIVET L LENGTH MAX MM | CODE | | QTY PER BLISTER | PACKS PER OUTER | RIVET DIA INCH | RIVET L LENGTH MAX MM | |
|------------------------------------|--|-----------------|-----------------|----------------|-----------------------|--------------------------------|--|-----------------|-----------------|----------------|-----------------------|------|
| ALUMINIUM RIVET, STEEL STEM | | | | | | STEEL RIVET, STEEL STEM | | | | | | |
| AS4-2P | | 100 | 10 | 1/8 | 3.2 | 6.7 | SB4-2P | 100 | 10 | 1/8 | 3.2 | 6.7 |
| AS4-3P | | 100 | 10 | | | 8.2 | SB4-3P | 100 | 10 | | | 8.2 |
| AS4-4P | | 100 | 10 | | | 9.9 | SB4-4P | 100 | 10 | | | 9.9 |
| AS4-6P | | 100 | 10 | | | 13.0 | SB4-6P | 100 | 10 | | | 13 |
| AS4-8P | | 100 | 10 | | | 16.2 | SB4-8P | 100 | 10 | | | 16.2 |
| AS4-10P | | 100 | 10 | | | 19.4 | | | | | | |
| | | | | | | | SB5-2P | 100 | 10 | 5/32 | 4.0 | 7.3 |
| AS5-2P | | 100 | 10 | 5/32 | 4.0 | 7.3 | SB5-3P | 100 | 10 | | | 8.9 |
| AS5-3P | | 100 | 10 | | | 8.9 | SB5-4P | 100 | 10 | | | 10.5 |
| AS5-4P | | 100 | 10 | | | 10.5 | SB5-6P | 50 | 10 | | | 13.6 |
| AS5-5P | | 50 | 10 | | | 12.0 | SB5-8P | 50 | 10 | | | 16.8 |
| AS5-6P | | 50 | 10 | | | 13.6 | | | | | | |
| AS5-8P | | 50 | 10 | | | 16.8 | SB6-2P | 50 | 10 | 3/16 | 4.8 | 8.0 |
| | | | | | | | SB6-3P | 50 | 10 | | | 9.5 |
| AS6-2P | | 50 | 10 | 3/16 | 4.8 | 8.0 | SB6-4P | 50 | 10 | | | 11.1 |
| AS6-3P | | 50 | 10 | | | 9.5 | SB6-6P | 50 | 10 | | | 14.3 |
| AS6-4P | | 50 | 10 | | | 11.1 | SB6-8P | 50 | 10 | | | 17.5 |
| AS6-5P | | 50 | 10 | | | 12.7 | | | | | | |
| AS6-6P | | 50 | 10 | | | 14.3 | STAINLESS STEEL RIVET, STAINLESS STEEL STEM | | | | | |
| AS6-8P | | 50 | 10 | | | 17.5 | SSB4-2P | 100 | 10 | 1/8 | 3.2 | 6.7 |
| AS6-10P | | 50 | 10 | | | 20.7 | SSB4-3P | 100 | 10 | | | 8.2 |
| | | | | | | | SSB4-4P | 100 | 10 | | | 9.9 |
| | | | | | | | SSB4-6P | 100 | 10 | | | 13.0 |

COLOURED BLISTER PACK RANGE

| CODE | COLOURBOND COLOUR | | QTY PER BLISTER | PACKS PER OUTER | RIVET DIA INCH | RIVET L LENGTH MAX MM |
|---|-------------------|--|-----------------|-----------------|----------------|-----------------------|
| ALUMINIUM RIVET, STEEL STEM - COLOURED | | | | | | |
| AS4-3PBA | BASALT™ | | 100 | 10 | 1/8 3.2 | 8.2 |
| AS4-3PCC | CLASSIC CREAM™ | | 100 | 10 | | |
| AS4-3PCG | COTTAGE GREEN™ | | 100 | 10 | | |
| AS4-3PC | COVE™ | | 100 | 10 | | |
| AS4-3PDO | DEEP OCEAN® | | 100 | 10 | | |
| AS4-3PD | DUNE® | | 100 | 10 | | |
| AS4-3EH | EVENING HAZE® | | 100 | 10 | | |
| AS4-3PG | GULLY™ | | 100 | 10 | | |
| AS4-3PIR | IRONSTONE™ | | 100 | 10 | | |
| AS4-3PJ | JASPER™ | | 100 | 10 | | |
| AS4-3PMR | MANOR RED™ | | 100 | 10 | | |
| AS4-3PM | MONUMENT™ | | 100 | 10 | | |
| AS4-3PNS | NIGHT SKY™ | | 100 | 10 | | |
| AS4-3PPE | PALE EUCALYPT™ | | 100 | 10 | | |
| AS4-3PP | PAPERBARK™ | | 100 | 10 | | |
| AS4-3PSH | SHALE GREY™ | | 100 | 10 | | |
| AS4-3PSU | SURFMIST® | | 100 | 10 | | |
| AS4-3PTE | TERRAIN™ | | 100 | 10 | | |
| AS4-3PWA | WALLABY™ | | 100 | 10 | | |
| AS4-3PWIL | WILDERNESS® | | 100 | 10 | | |
| AS4-3PWI | WINDSPRAY® | | 100 | 10 | | |
| AS4-3PWG | WOODLAND GREY™ | | 100 | 10 | | |

